




CONE




REFLECTORIZED CONE




FLEXIBLE DELINEATOR




VERTICAL PANEL  
POST MOUNTED




DRUM




TYPE II BARRICADE

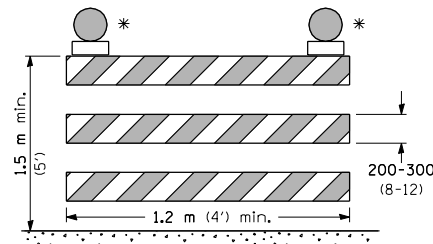

TYPE III BARRICADE



DIRECTION INDICATOR  
BARRICADE



VERTICAL BARRICADE

\* Warning lights (if required)

### GENERAL NOTES

All heights shown shall be measured above the pavement surface.

All dimensions are in millimeters (inches) unless otherwise shown.


Illinois Department of Transportation	
APPROVED	April 1, 2004
ENGINEER OF OPERATIONS	
APPROVED	April 1, 2004
ENGINEER OF DESIGN AND ENVIRONMENT	
ISSUED	1-1-97

DATE	REVISIONS
4-1-04	Removed Type I barricade and constr. speed limit sign.
1-1-03	Rev. devices to meet NCHRP 350.

## TRAFFIC CONTROL DEVICES

(Sheet 1 of 3)


**STANDARD 702001-04**

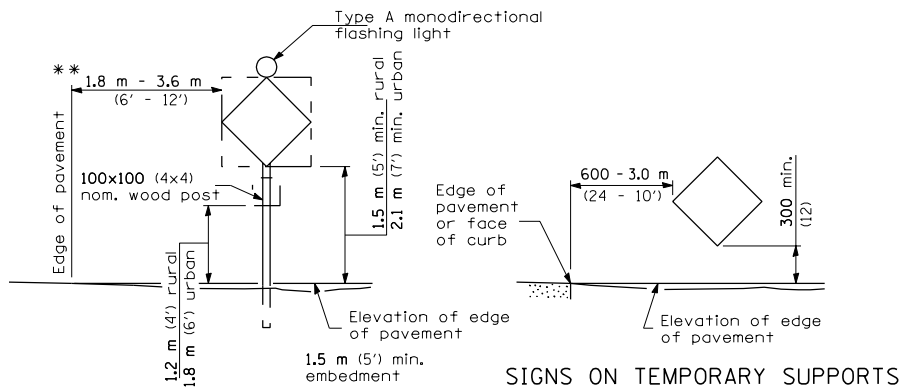

**SIGNS ON TEMPORARY SUPPORTS**

### POST MOUNTED SIGNS

\*\* When curb or paved shoulder are present this dimension shall be 600 mm (24") to the face of curb or 1.8 m (6') to the outside edge of the paved shoulder.

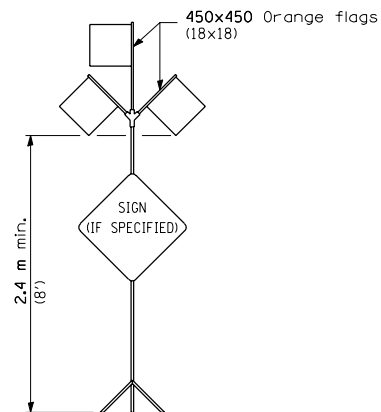

**HIGH LEVEL WARNING DEVICE**

ROAD  
CONSTRUCTION  
NEXT X MILES

G20-1(0)-6036

END  
CONSTRUCTION


G20-2a(0)-6024

This signing is required for all projects 3200 m (2 miles) or more in length.

ROAD CONSTRUCTION NEXT X MILES sign shall be placed 150 m (500') in advance of project limits.

END CONSTRUCTION sign shall be erected at the end of the job unless another job is within 3200 m (2 miles).

### WORK LIMIT SIGNING

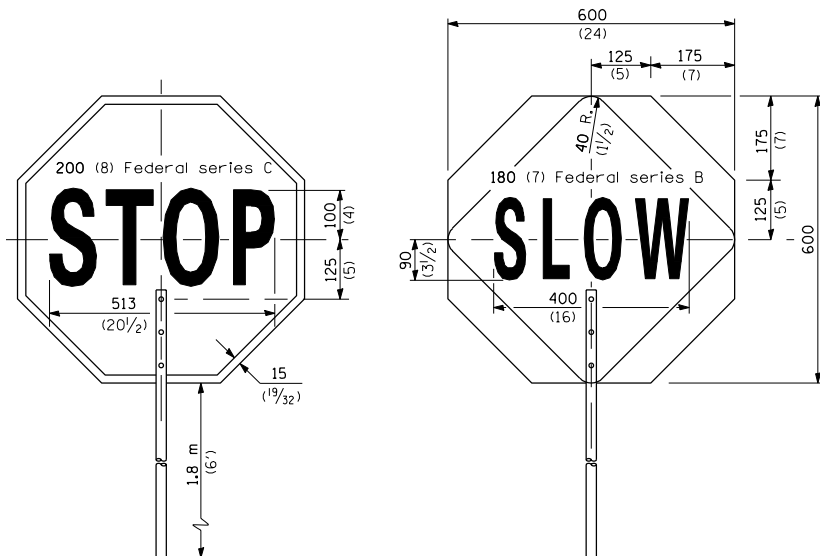

FRONT SIDE

REVERSE SIDE

**FLAGGER TRAFFIC CONTROL SIGN**


All dimensions are in millimeters (inches) unless otherwise shown.

Illinois Department of Transportation	
APPROVED	April 1, 2004
<i>[Signature]</i>	
ENGINEER OF OPERATIONS	
APPROVED	April 1, 2004
<i>[Signature]</i>	
ENGINEER OF DESIGN AND ENVIRONMENT	
ISSUED	16-1-1-97


TRAFFIC CONTROL  
DEVICES

(Sheet 2 of 3)



**STANDARD 702001-04**

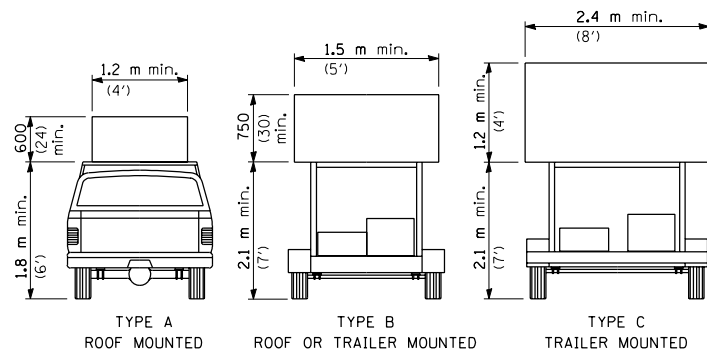

ARROW BOARDS

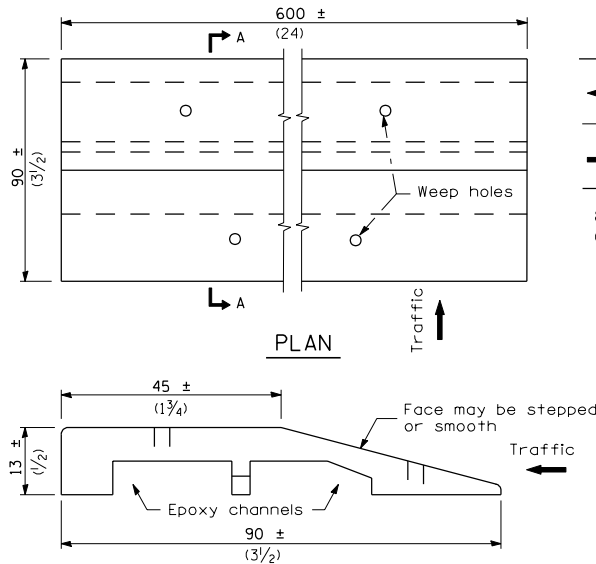


SECTION A-A

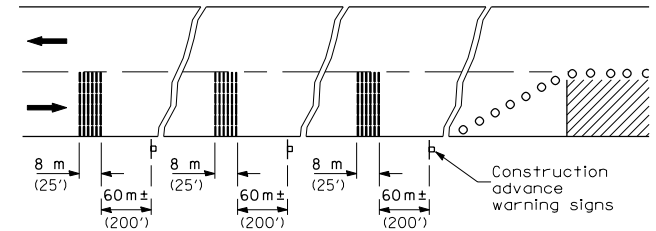


TYPICAL INSTALLATION

TEMPORARY RUMBLE STRIPS

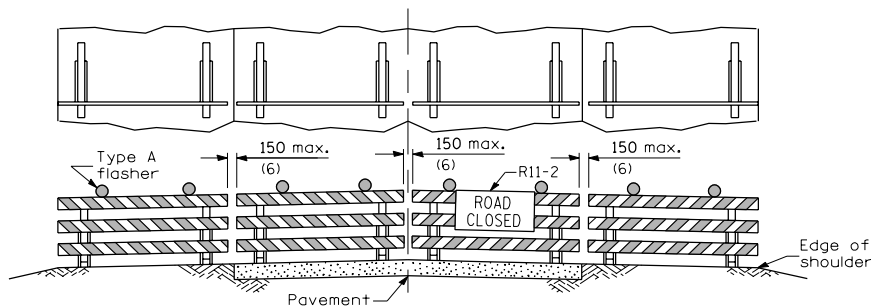

ROAD CLOSED TO ALL TRAFFIC

ReflectORIZED striping may be omitted on the back side of the barricades. If a Type III barricade with an attached sign panel which meets NCHRP 350 is not available, the sign may be mounted on an NCHRP 350 temporary sign support directly in front of the barricade.

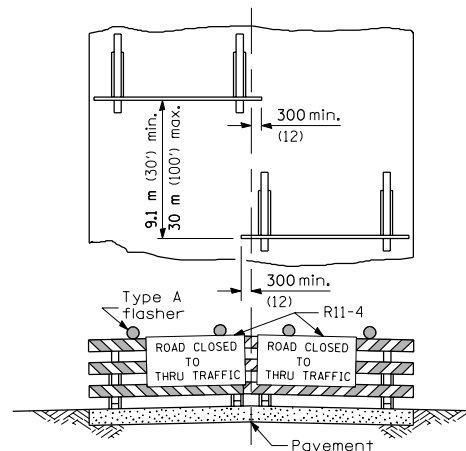

ROAD CLOSED TO THRU TRAFFIC

ReflectORIZED striping shall appear on both sides of the barricades. If a Type III barricade with an attached sign panel which meets NCHRP 350 is not available, the signs may be mounted on NCHRP 350 temporary sign supports directly in front of the barricade.

All dimensions are in millimeters (inches) unless otherwise shown.

TYPICAL APPLICATIONS OF  
TYPE III BARRICADES CLOSING A ROAD